


GPC 3x2.5 mm² power cable Reussen shielded (85025)

Reussen shielded power cable for mains power to your Hi-End Audio Gear. This cable ensures best transport of needed energy (up to 1650 Watt and 15 Ampere current) to your device but due to our exclusive Reussen shielding and conductive separation layer, this is protecting your signal cables nearby even better from humm and RF noise generated by the 50Hz signal going tru the power supply cable.

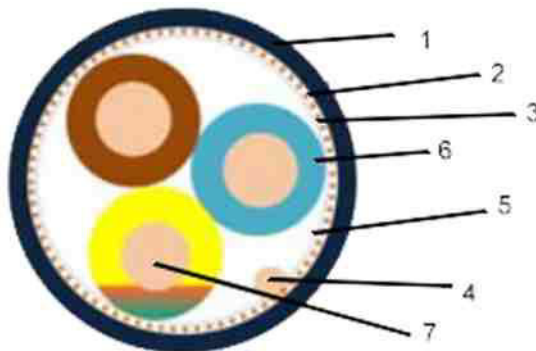

1	Jacket	PVC, (Ym2 1.10 mm, ø 9.5 max., dark blue
2	wrapping	Non woven fabric tape
3	Shield 1	Bare copper wires (0.15 mm), 100% coverage S
4	Drain wire	ø 16 x 0.19 mm Cu (Ground) bare copper
5	Shield 2	Conductive Fleece Foil (Petpal)
6	Insulation 3x	PE-2YI 1 0.50 mm thickness, nominal diameter 3.05 mm color code: blue-brown-yellow/green
7	Conductor 3x	ø 45x0,25mm Cu 2,50mm ² bare copper stranded IEC 60228 Class 5 flexible copper conductor 2,50mm ²

Conductor resistance	< 8.2 Ohm /km	Test voltage	2000 V eff.
		Rating voltage	300 /500V
Power rating	< 1650 Watt		
Current max.	15.0 Ampere	Temperature range	-30° to +70° C

Order No.	Type	ø mm	Color	Spool Size	Weight /Spool	Shipping Unit
85025	GPC 3x2.5 mm ²	9.5	dark blue	100 m	16.5 kg	2 x 100 m