


GAC-2 double shielded high flex (1040x)

Ultraflexible professional audio cable for microphones. 'Double Reussen Shield', velvet matte non reflecting PVC-jacket material.

A unique separation tube between conductors and shields provides increased stability, flexibility and protection of the conductors. Ideal cable for accomodation of XLR-connectors (Amphenol or Switchcraft!).

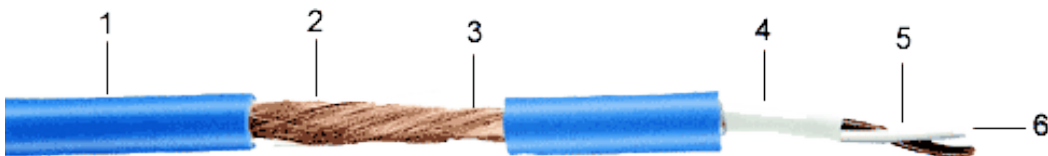

1	Jacket	PVC, \varnothing 5.4 mm
2	Shield No. 1	Bare copper wires (0.10 mm), 100% coverage
3	Shield No. 2	Bare copper wires (0.10 mm), 100% coverage
4	Separation	PVC, \varnothing 3.1 mm, white tube
4	Insulation	PVC, \varnothing 1.20 mm, white and brown, wrapped, twisted pair
5	Conductor	Stranded bare copper wires, 48 x 0.07 mm (0.19 mm ²)

Conductor resistance	< 90 Ohm /km	Test voltage cond/cond	500 V eff.
Shielding resistance	< 20 Ohm /km	Test voltage cond/shield	2000 V eff.
Cap. @ 800 Hz, cond/cond	< 125 nF /km	Operating voltage	low voltage
Cap. @ 800 Hz, cond/shield	< 189 nF /km	Temperature range (flex)	- 5° to +50° C
		Temperature range (fix)	-30° to +70° C

Order No.	Type	\varnothing mm	Color	Spool Size	Weight /Spool	Shipping Unit
10401	GAC-2	5.4	red	100 m	4.5 kg	4 x 100 m
10403	GAC-2	5.4	pink	100 m	4.5 kg	4 x 100 m
10404	GAC-2	5.4	blue	100 m	4.5 kg	4 x 100 m
10405	GAC-2	5.4	black	100 m	4.5 kg	4 x 100 m
10406	GAC-2	5.4	yellow	100 m	4.5 kg	4 x 100 m
10407	GAC-2	5.4	mint	100 m	4.5 kg	4 x 100 m
10408	GAC-2	5.4	black	300 m	15.2 kg	2 x 300 m
10409	GAC-2	5.4	black	1000 m	47.0 kg	1 x 1000 m
10412	GAC-2	5.4	green	100 m	4.5 kg	4 x 100 m