


### GPC 3x1.5 mm<sup>2</sup> | 3x2.5 mm<sup>2</sup> power cable shielded (85215 |85225)

Fire rated and shielded power cable for mains power to your high-end audio gear. This cable ensures best transport of needed energy to our device but due to effective shielding, this is protecting your signal cables nearby even better from humm and RF noise generated by the 50Hz signal going through the power supply cable.

85225 as 3x2.5mm<sup>2</sup> is for higher current

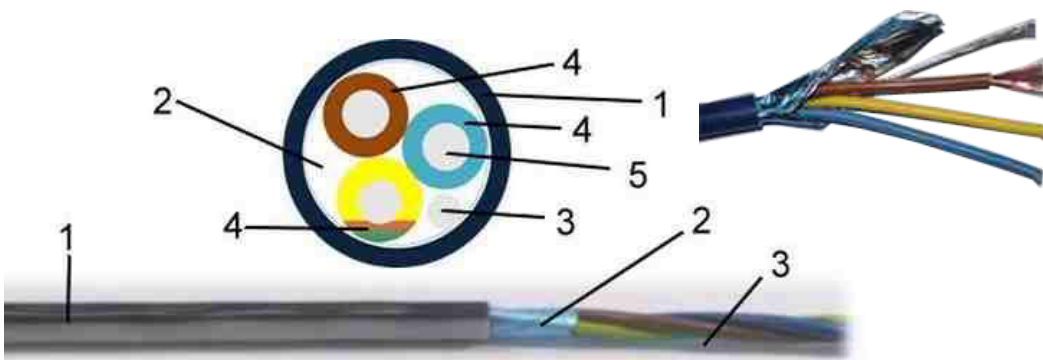

FRNC = Flame Retardant Non Corrosive = Flame retardant per IEC-332-1 test standard

1	Jacket	LSOH, (HM 2 - DIN VDE 0207 part 24), ø max 8.2   ø 9.9 , marine blue
2	Shield	Aluminum-Polyester foil
3	Drain wire	ø 19 x 0.18 mm (Ground) tinned copper wires SnCu
4	Insulation 3x	LSOH – HI 2, 0.70mm thickness, nominal diam. ø 2.95 mm, color code: blue-brown-yellow /green
5	Conductor	ø 27   ø 45 x 0.25 mm, Cu 1.30 mm <sup>2</sup>   2.20 mm <sup>2</sup> bare copper stranded

Conductor resistance	< 15.5   8.2 Ohm /km	Test voltage	2000 V eff.
		Rating voltage	300 /500V
Power rating	900  1650 Watt		
Current max.	9.0   15.0 Ampere	Temperature range	-30° to +70° C

Order No.	Type	ø mm	Color	Spool Size	Weight /Spool	Shipping Unit
85215	GPC 3x1.5 mm <sup>2</sup>	8.2	marine blue	100 m	10.9 kg	2 x 100 m
85225	GPC 3x2.5 mm <sup>2</sup>	9.9	marine blue	100 m	15.7 kg	2 x 100 m